

# CAFENCE DEPOT

Full line of Temporary Fencing Supply

## All Temporary Fencing Needs

- \* Temporary fence panels
- \* Crowd barriers
- \* Privacy windscreens



## CAFENCE DEPOT

20510 EARLGATE ST.  
WALNUT CA 91789

Tel : 626-566-7815

Fax: 626-213-0752

Website: [www.cafence.com](http://www.cafence.com)

E – mail: [sales@cafence.com](mailto:sales@cafence.com)



# 1-888-242-2437

CAFENCEDEPOT Inc. is a company dedicated to providing our customers with all Temporary Fencing needs, including MH style Temporary Fence Panels, Fence Panel Stands, Privacy Windscreens, Crowd Barriers and a Full Line of Fence Fittings. We provide Temporary Fencing supplies all in one.

We are located in Sothern California, City of Walnut, in the Los Angeles County. We are the member of American Fence Association.

CAFENCEDEPOT Inc. is not only a wholesale company catering Temporary Fencing supply in Sothern California, but also cater to any other states throughout the United States. We deal with shipping our products by any 20 ft, 40ft or 45ft containers door to door from our mills to your location.



### TEMPORARY FENCE PANELS

Our temporary fence panels offer excellent return on investment for fencing rentals, construction and event control applications. Snag-free design reduces damages to the panels, heavy duty welds for longer life.

Our panels are constructed with rugged, heavy duty welded 1-3/8" or 1-5/8" 16 gauge frame and center uprights, each panel section is laced with 11.5 gauge galvanized wires, so the chain link fabric is completely surround by the frame, virtually eliminating snags and reducing damages to the panels.

This fencing product is available in MH style 6' high by 10', 12', and 14' lengths panel or 8' high by 10' and 12 lengths panel (Option for Horizontal and Vertical Brace), 30" by 18", 24" by 24" T-stand or 24" by 6" flat base stand. We also carry the 6' high by 14' lengths Temp Fence Panels with 2rights (2-7/8"OD x 11ga.) welded to each side frames.

We have pricing for individual panels, or save big on ordering master quantities by 40' or 45' container.





## Light Weight Crowd Control Barrier

### Product Specifications

**Overall Length:** 89" (82" when interlocked)

**Overall Height:** 43"

**Weight(with bases):** 30 lbs.

**Material:** Galvanized Steel.

**Main Frame:** The outer frame (main frame) is made of 1-3/8" O.D. galvanized steel tubing, minimum 18 gauge. The outer frame is a single length of tubing without welds or deformation. Pipe is bent at right angles with a minimum of smooth deformation. Horizontal and vertical bars are at right angles to overall frame.

**Grill:** 17 equally-spaced bars inside vertical members made of 3/8" O.D. galvanized steel tubing, minimum 19 gauge. Minimum of 1/2" weld at the top and at the bottom of each upright bar. 17 interior bars are 4" apart.


**Locking:** Male-Female interlocking ends. Units join and unlock at one position (30 degrees). Male interlocking device is a minimum 1/2" diameter rod welded through main frame at both ends. Male-Female connections have enough clearance to allow for uneven ground, a minimum of 1/2" on top and bottom when connected.

**ID Plate:** Steel panel plate 8"x5" welded to frame prior to hot dip galvanizing. Steel bar welded to the bottom of the sign plate is rounded so it will not pinch or cut your fingers; also can be used as a carrying handle.

**Bases:** Two (2) bolt on flat bases 3/4"x1-5/8" galvanized flat square tubing with 1-1/4" O.D. x12ga. Galvanized steel tubing.

**Finish:** Entire panel is hotdipped galvanized after welding conforming to Marine specifications. Every barrier is filed after galvanizing so that burrs from galvanizing are filed smooth and there are no sharp points.

**Warranty:** 1-year warranty against manufacturer's defects.

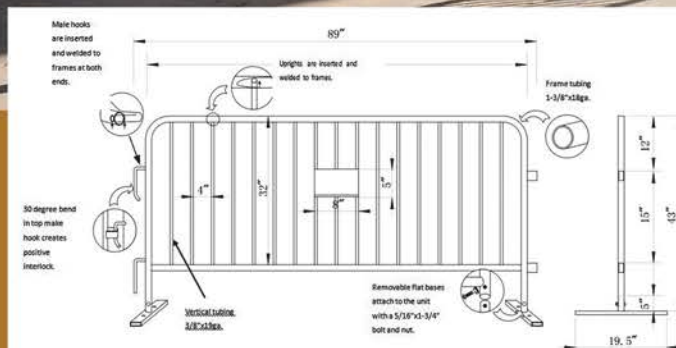

## TEMPORARY FENCE PANEL SUPPORT SYSTEM

- 6"x1-3/8"x16ga Overall length welded a 6"x1-3/8"x16ga and 6"x1-5/8"x16ga on each end.
- 2' Overall length rebar coated in orange, handles with rings at one side, sharp point at another side.
- 6" Round pipe welded on a 6"x6"x1/4" floor flange, used on a concrete floor with PS635-A.



# Privacy Fence Windscreens

(Dark Green, Black, Green and Tan)

100% High quality knitted polyethylene design with UV resistant. These windscreens design by 3.83 oz/yd<sup>2</sup>, 88% visibility blockage. These privacy nets fabricated with reinforced binding and Aluminum GROMMETS all 4 sides, **DOUBLE GROMMETS** on each corner. These privacy fence screens are ideal for construction, commercial and residential fence projects.


Available in following sizes:

Precut fence screen panels: 5'8" (6') X 50' length  
7'8" (8') X 50' length  
5'8" (6') X 9'8" (10') length  
5'8" (6') X 11'8" (12') length  
Privacy fence screen rolls 5'8" (6') X 150' length



We have pricing save big on ordering master quantities by pallet and deliver to any north American location.

(Note: 2,400 linear feet 5'8" x 50' and 1,500 linear feet 7'8" x 50' per pallet)

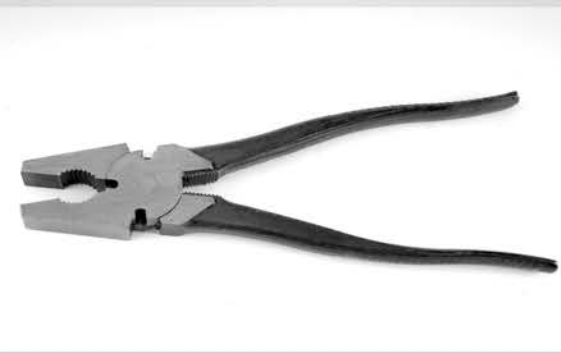

## FENCE TOOLS

**Forged steel hog ring pliers:**

- 8" with removable spring and guide.
- Grooved jaws allow "slip proof" action; jaw opening is 2-1/4" for heavy gage rings.
- Forged steel construction with zinc plated finish.

**"Crescent Style" - 10" Button Fence Pliers:**

- Cushion grip handles.
- Flat nose with 3 wire cutters, pipe grip and teeth in tip of nose.
- For construction and maintenance of wire fencing.
- 1-1/2" nose (tip to throat, not to rivet), 1-9/16" base nose width, 5/8" maximum thickness.
- Edge Type/Cut Capacity: Standard/11 AWG.
- Made of forged alloy tool steel.

**Accessories:**

- Panel Clamps 8ga. x 1-1/2" for 1-3/8" X 1-3/8" or 1-5/8" X 1-5/8"
- Saddle Clamps 8ga. x 1-1/2" for 1-3/8" X 1-3/8"
- HDG Carriage Bolts & Nuts 3/8" X 2-1/4"
- 8" Standard Fence Windscreen Ties, Black, 50 lb Capacity 8" X 3/8"